




First choice when
quality counts.™

Heated Hoses & Fittings

- Teflon line cores
- Stainless steel braid reinforcing
- 100 ohm RTD sensor
- High temperature insulation
- Polyester braid cover
- JIC end fittings



2000 psi
heated hose

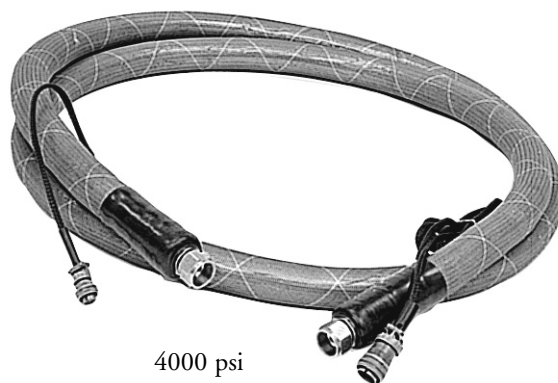

4000 psi
heated hose

**For material
consistency
in hot melt
dispense**

Graco heated hoses are designed to provide an added measure of temperature control and flexibility from the supply unit to the applicator gun or valve.

Hose heating is provided by resistance heaters wrapped around the hose cover and covered with a high temperature insulation.

Hose temperature is regulated by a solid state controller mounted in the supply unit panel.

27000 Series LP Hoses

Max. working pressure: 2000 psi (13.8 MPa, 138 bar)

Low pressure heated hoses for:
Therm-O-Flow 5 and Therm-O-Flow 55

Part No.	ID	Length	Hose Fitting Thread	Watts per hose ft.
C34-097	0.31 in.	10 ft.	9/16-18(f)	50 wpf
C34-113	0.31 in.	20 ft.	9/16-18(f)	50 wpf
C34-118	0.31 in.	20 ft.	9/16-18(f)	50 wpf
C34-089	0.51 in.	6 ft.	7/8-14(f)	50 wpf
C34-098	0.51 in.	10 ft.	7/8-14(f)	50 wpf
C34-107	0.51 in.	15 ft.	7/8-14(f)	50 wpf
C34-114	0.51 in.	20 ft.	7/8-14(f)	50 wpf
C34-119	0.51 in.	25 ft.	7/8-14(f)	50 wpf
C34-121	0.51 in.	30 ft.	7/8-14(f)	50 wpf

27000 Series Warm Melt Hoses

Max. working pressure: 4000 psi (28.0 MPa, 280 bar)

High pressure heated hoses for Therm-O-Flow
550/550G

Part No.	ID	Length	Hose Fitting Thread	Watts per hose ft.
C34-106	0.87 in.	15 ft.	1-5/16-12(f)	50 wpf
C34-112	0.87 in.	20 ft.	1-5/16-12(f)	50 wpf
C34-117	0.87 in.	25 ft.	1-5/16-12(f)	50 wpf

27000 Series HP Hoses

Max. working pressure: 4000 psi (28.0 MPa, 280 bar)

High pressure heated hoses for:
Therm-O-Flow 55

Part No.	ID	Length	Hose Fitting Thread	Watts per hose ft.
C34-099	0.40 in.	10 ft.	3/4-16(f)	50 wpf
C34-108	0.40 in.	15 ft.	3/4-16(f)	50 wpf
C34-086	0.51 in.	6 ft.	7/8-14(f)	50 wpf
C34-093	0.51 in.	10 ft.	7/8-14(f)	50 wpf
C34-102	0.51 in.	15 ft.	7/8-14(f)	50 wpf
C34-109	0.51 in.	20 ft.	7/8-14(f)	50 wpf
C34-115	0.51 in.	25 ft.	7/8-14(f)	50 wpf
C34-094	0.62 in.	10 ft.	1-1/16-12(f)	50 wpf
C34-104	0.62 in.	15 ft.	1-1/16-12(f)	50 wpf
C34-110	0.62 in.	20 ft.	1-1/16-12(f)	50 wpf
C34-116	0.62 in.	25 ft.	1-1/16-12(f)	50 wpf
C34-088	0.87 in.	6 ft.	1-5/16-12(f)	100 wpf
C34-095	0.87 in.	10 ft.	1-5/16-12(f)	100 wpf
C34-105	0.87 in.	15 ft.	1-5/16-12(f)	100 wpf
C34-111	0.87 in.	20 ft.	1-5/16-12(f)	100 wpf

Note: For single 0.87 in. I.D. hoses listed above, specify C32-128 hose support assembly; delete C32-124 from pump assembly. For dual 0.88 in. ID heated hoses, specify C32-278 dual hose manifold.

Accessories

27000 Series Hose Fittings

All fittings are JIC, 37° taper seat one end and npt(m) other end.

Hose End Thread	NPT End Thread	Part No.		
		Straight	45° Elbow	90° Elbow
9/16-18(m)	1/4 npt(m)	C20-688	C20-652	C20-676
	3/8 npt(m)	C20-684	C20-654	C20-670
3/4-16(m)	3/8 npt(m)	C20-585		C20-677
	1/2 npt(m)	C20-700	C20-972	C20-678
7/8-14(m)	1/2 npt(m)	C20-703	C20-655	C20-679
	3/4 npt(m)	C20-595	C20-665	C20-687
1-1/16-12(m)	3/4 npt(m)	C20-708	C20-666	C20-681
	1 npt(m)	C20-647		C20-694
1-5/16-12(m)	3/4 npt(m)	C20-709	C20-651	C20-690
	1 npt(m)	C20-586	C20-650	C20-686