

190252 (GFC-501) 20 OZ. ACETAL GRAVITY FEED CUP WITH DISPOSABLE LINER

Important: Before using this equipment, read all safety precautions and instructions. Keep for future use.

Note

This cup is compatible for use with Halogenated Hydrocarbon solvents such as 1, 1, 1 Trichloroethane and Methylene chloride.

DESCRIPTION

GFC-501 (acetal) 20 Oz. Cup

This gravity feed cup is designed to work with the GFG, GFHV, GTI and FLG gravity feed spray guns and with or without the Devilbiss disposable cup liner. The cup liner allows painting in any position and simplifies clean up. The cup is constructed from acetal which is easier to clean and resists stains better than nylon. This cup has a unique drip check lid to prevent paint from dripping out of the vent in the lid. It has a high grade stainless steel connector, compatible with waterbornes and all common coating materials.

INSTALLATION

Protective coatings have been used to protect the cup after manufacture. Flush all equipment with a suitable solvent before use to remove these coatings from the material passages.

ASSEMBLY OF CUP TO GUN (with or without disposable liner)


1. Remove one of the cup gaskets (#4 (White) for GFG and GFHV guns) (#4A (Blue) for GTI and FLG guns) from the poly bag.
2. Place this cup gasket in the fluid inlet of the gun body. See page 3 Cup Drawings.
3. Store remaining cup gasket in a safe place for future use.
4. Place filter (5) in cup outlet at this time if desired. See page 3 Cup Drawings.
5. Assemble cup to gun and tighten hand tight.

ASSEMBLY OF DISPOSABLE CUP LINER


Note

This paint cup can be used with or without the cup liner. Skip to page 2, column 1, Filling With Paint (without disposable cup liner) if not using cup liner.


1. Locate piercing tool.

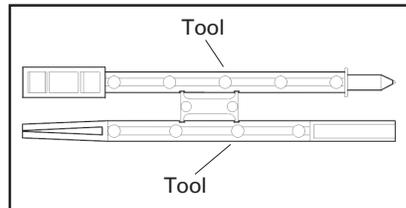


2. "Break-off" tool sections from web.

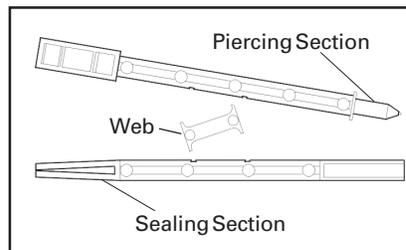


3. Locate tool connection ends.

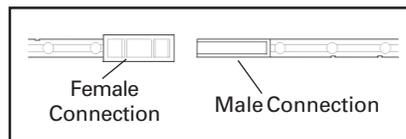


4. Assemble tool connection together until it "clicks" twice.




5. Locate drain bushing and piercing end of tool.

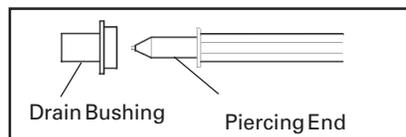


6. Assemble bushing on tool.

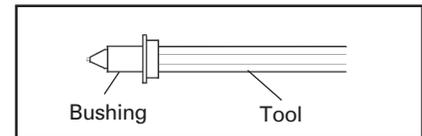

7. Open liner and insert bushing through liner bottom.

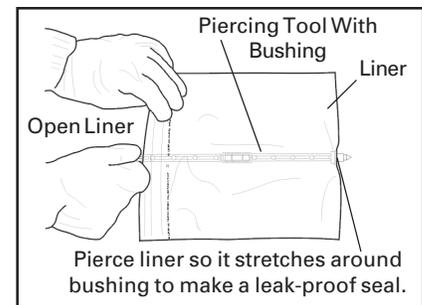


8. Insert liner with bushing into cup hole.

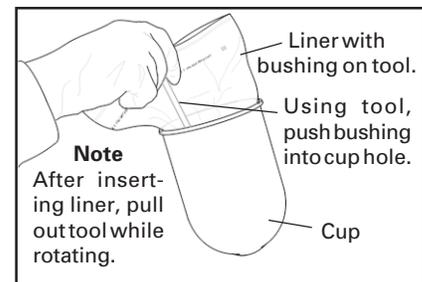


FILLING WITH PAINT (with disposable cup liner)

1. Place gun in gun holder and carefully open liner. Don't pull liner up or bushing may be pulled out of drain hole.
2. While holding funnel/strainer, fill the liner to within 1" (25 mm) of the cup's top. This will allow room to fold the liner into the paint cup.

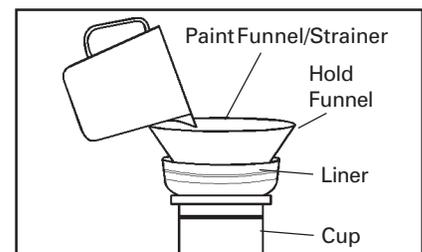

- Starting at one end, slip the liner sealer end of the piercing tool over the liner's zipper. Hold the liner at the same end and slide the tool along the zipper. Make sure the tool overlaps the zipper.

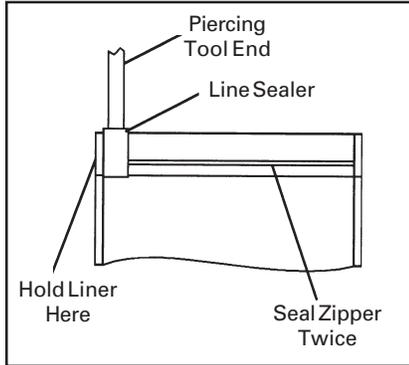

Note

Double check the zipper by sliding your fingers along the zipper. Smooth out any "Bumps". "Bumps" are an indication the zipper is not sealed at that area.

- Fold top of liner down into cup before installing lid.

FILLING WITH PAINT (without disposable liner)

Fill the cup with paint to the bottom of the threads. **Do not overfill.**

INSTALLING THE LID


Place plastic lid on the top of the cup, and **hand tighten**. Fold vent cap and push onto center portion of lid (if vent cap is not already assembled).

PAINTING

This disposable liner allows you to spray in any position, even upside down. To spray upside down, you must first purge the air from the cup liner.

To purge air from cup liner:

- Connect to proper air supply (minimum of 30 PSI)
- Turn cup upside down (See Figure below)
- Trigger gun until a constant paint flow is observed.

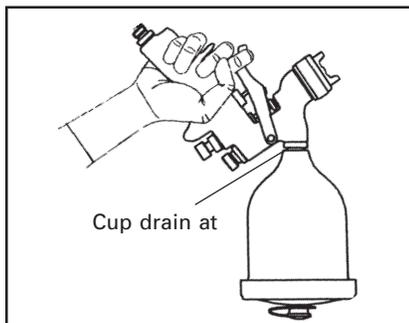

CLEANING (without disposable liner)

Note


For routine cleaning, it is not necessary to remove cup from gun. Do not remove washer (4) from gun. If washer (4) is removed, it must be replaced.

Remove lid and properly dispose of any excess paint. Pour in a small amount of clean solvent. The amount will vary with different coatings and solvents. Reinstall lid. Shake cup to wash down the inside surfaces. Pull trigger to allow some solvent to be flushed through gun. Remove lid and pour out dirty solvent. Add a small amount of clean solvent and repeat procedure. Wipe exterior of cup and lid with a clean cloth and clean solvent.


If a paint filter was used in the bottom of the cup outlet, it should be removed and cleaned or replaced at this time.

CLEANING (with disposable cup liner)

- Disconnect the air hose and remove the paint cup lid.

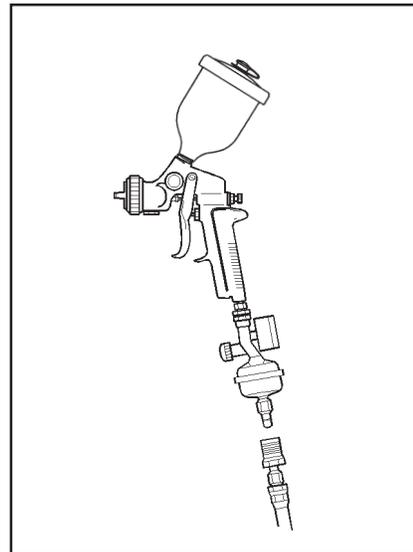

- While holding disposable cup liner, point gun upwards and pull trigger to allow paint in gun to drain into liner.

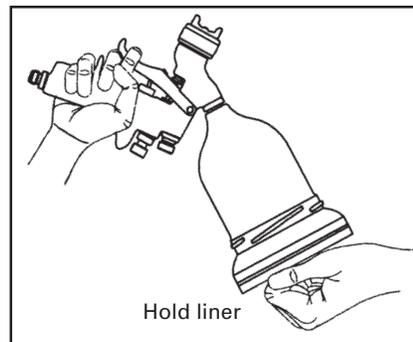

- While still pointing the gun upwards, carefully pull out liner. Keep drain bushing up to prevent leaking. To prevent paint from being forced out of bushing, don't squeeze the liner while handling it.




Note

If there is a large amount of paint in paint liner, open zipper and empty paint before removing liner.


- Properly dispose of remaining paint in paint liner. Open zipper to allow for quicker draining of paint. Dispose of used liner and bushing - **Do Not Re-use.**

Note

If drain bushing remains in cup drain, use needle nose pliers to remove. See Step 6 for proper cleaning.

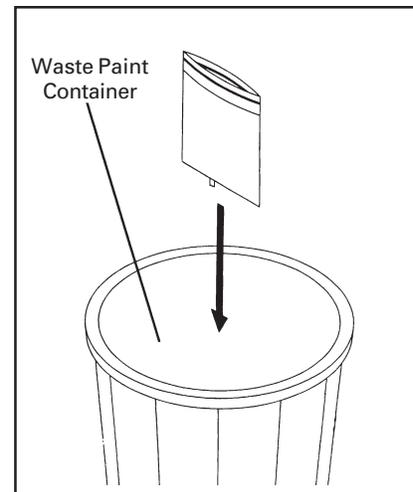

- Pour a small amount of clean paint solvent into paint cup.

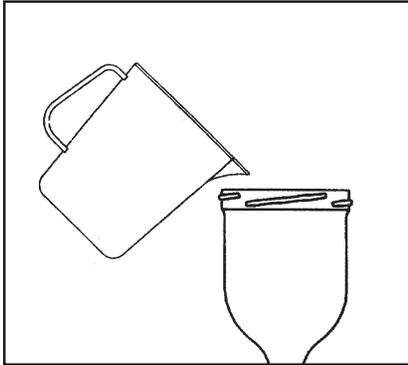



- Clean drain hole with cleaning brush (not supplied with cup). Drain hole must be kept clean for proper sealing and easy removal of drain bushing.

PARTS LIST

Ref. No.	Replacement Part No.	Description
1	GFC-501	Cup Assembly, 20 oz. Acetal
2	GFC-402	Cup Lid Assembly
3	GFC-2-K5	Drip Check Lid (Kit of 5)
4	KGP-12-K5	Cup Gasket (White) (Kit of 5)
4A	KGP-13-K5	Cup Gasket (Blue) (Kit of 5)
5	KGP-5-K5	Filter (Kit of 5)
6*	OMX-70-K48	Disposable Liner Kit (Kit of 48)

* Kit includes 1 piercing tool, necessary liners and drain bushings.

CUP DRAWINGS

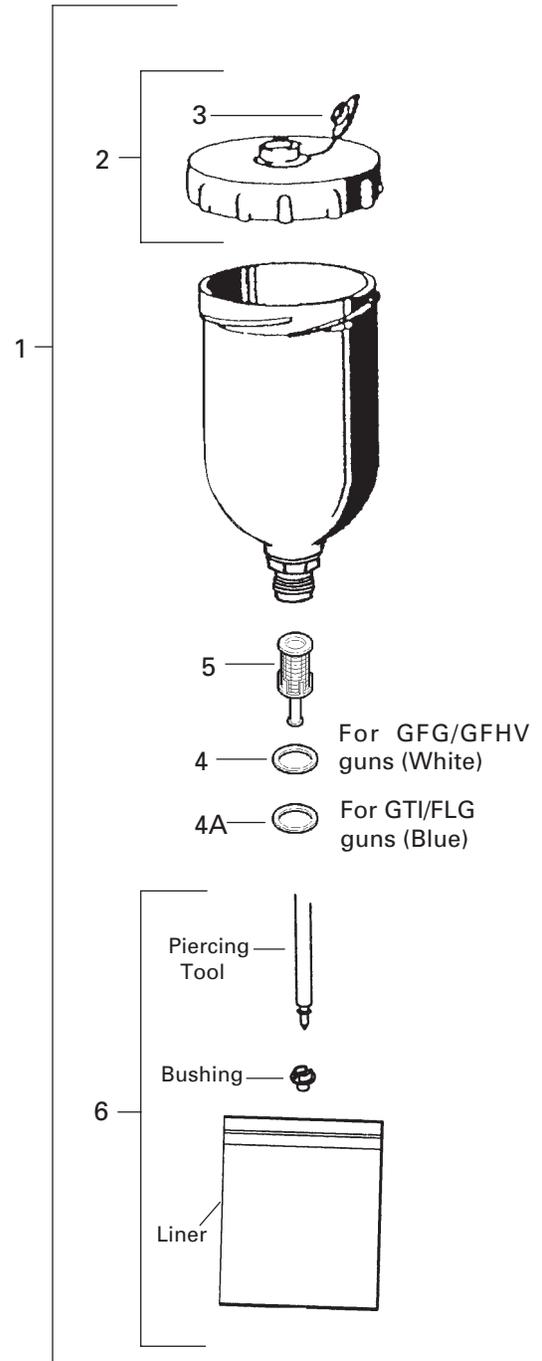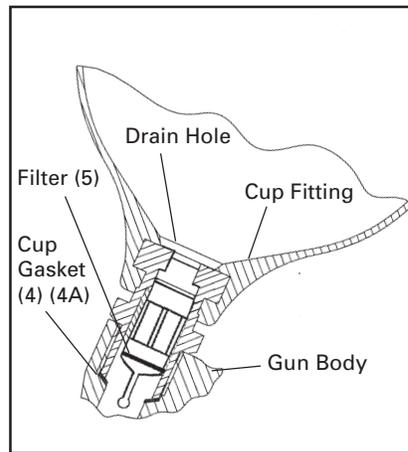

WARRANTY

This product is covered by DeVilbiss' 1 Year Limited Warranty. See SB-1-000 which is available upon request.

DeVILBISS WORLDWIDE SALES AND SERVICE LISTING - www.devilbiss.com

INDUSTRIAL FINISHING

DeVilbiss has authorized distributors throughout the world. **FOR TECHNICAL ASSISTANCE OR THE DISTRIBUTOR NEAREST YOU, CALL TOLL FREE 1-888-992-4657 (U.S.A. AND CANADA ONLY). FOR LOCAL CALLS, SEE LISTING BELOW.**

U.S./Canada Sales & Customer Service Office GLENDALE HEIGHTS, IL 60139	Address 195 Internationale Blvd.	Telephone No. (630) 237-5000 Toll Free Fax No. 1-877-790-6965
---	-------------------------------------	---

AUTOMOTIVE REFINISHING

DeVilbiss has authorized distributors throughout the world. For equipment, parts and service, check the Yellow Pages under "Automobile Body Shop Equipment and Supplies". **FOR TECHNICAL ASSISTANCE, CALL TOLL FREE 1-800-445-3988 (U.S.A. ONLY). FOR LOCAL CALLS, SEE LISTING BELOW.**

U.S. Customer Service Office MAUMEE, OH 43537	Address 1724 Indian Wood Circle	Telephone No. (419) 891-8100 Toll Free Fax No. 1-800-445-6643
--	------------------------------------	---



An Illinois Tool Works Company