

HAF-505 55 CFM COALESCING FILTER

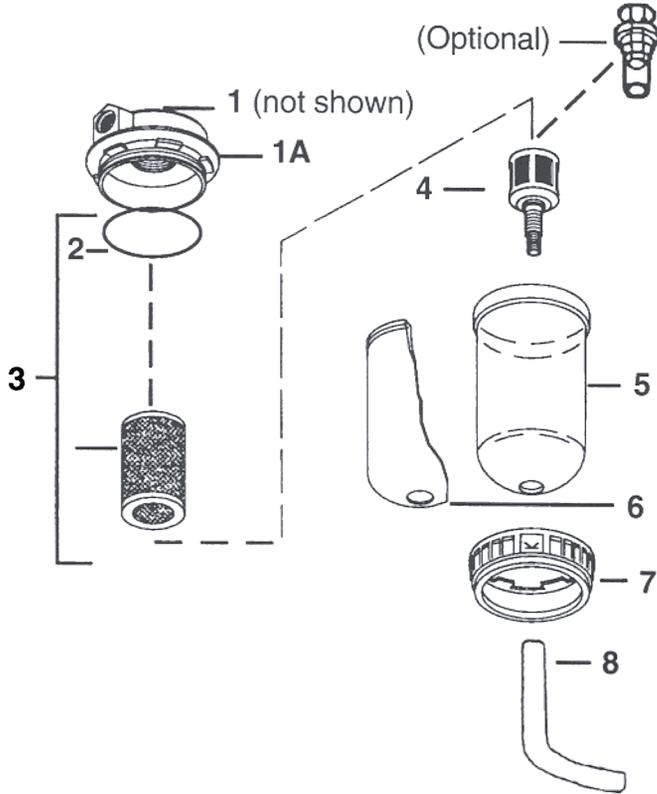


Figure 1 HAF-505 & HAF-511 55 CFM Air Filter

PARTS LIST

Ref No. No.	Replacement Part No.	Description	Ind. Parts Required
1	HAF-404	Filter Change Indicator (not shown)	1
1A	---	Cover	1
2	---	O-Ring	1
3	HAF-28	Filter & O-Ring Kit	1
4	HAF-18	Automatic Drain (Standard)	1
5	HAF-8	Plastic Bowl	1
6	HAF-9	Metal Bowl Guard	1
7	HAF-409	Clamp Ring	1
8	HAF-27	1/2 x 3/8 Vinyl Tubing 6'	1
9	HAF-11	Manual Drain (Optional)	1

DESCRIPTION

The HAF-505, 55 CFM filter is designed to remove dirt, pipe scale and liquid aerosol. It includes a 0.01 micron filter element and automatic mechanical drain.

SPECIFICATIONS

Air Filter:	
Air Inlet	1/2" NPT(F)
Air Outlet	1/2" NPT(F)
Air Flow Capacity	55 CFM
Maximum Inlet Pressure	150 PSIG (10.3 Bar)
Maximum Operating Pressure	150 PSIG (10.3 Bar)
Maximum Temperature	150° F (65.6° C)
Filter	0.01 Micron

WARNING

Risk of personal injury.
 Risk of property damage.

Except as otherwise specified by the manufacturer, this product is specifically designed for compressed air service and use with any other fluid (liquid or gas) is a misapplication. For example, use with or injection of certain hazardous gases in the system (such as oxygen or liquid petroleum gas) could be harmful to the unit or result in a combustible condition that may cause fire or explosion. Manufacturer's warranties are void in the event of misapplication and manufacturer assumes no responsibility for any resulting loss.

INSTALLATION

WARNING

Risk of injury. Do not place unit in service without metal bowl guard installed. Filter units are sold only with metal bowl guards. To minimize the danger of flying fragments in the event of plastic bowl failure, guard must not be removed. If the unit is in service without the metal bowl guard installed, manufacturer's warranties are void and the manufacturer assumes no responsibility for any resulting loss. If unit has been in service and does not have a metal bowl guard, order one and install before placing back in service.

CAUTION

Certain solvents, paints and chemicals may attack plastic bowl and can cause bowl failure. Do not use near these materials.

1. Be sure to read all "Warnings" and "Cautions" in this manual and on the unit before installation or using this equipment.
2. Install filter as close as possible to point where air is being used. Install main air shut-off valve and standard pipe union (supplied by user) upstream of filter to allow maintenance to unit.
3. Install unit with air flow through filter in direction of arrow on top of unit.
4. Minimum 1/2" piping is recommended. Avoid using fittings, couplings, etc. that restrict air flow.
5. Mount filter in a vertical position.
6. Do not install filter in an application where the pressure drop will exceed 20 psi. For example, a quick opening valve located upstream from the filter could cause a momentary pressure drop in excess of 20 psi.
 Maximum inlet pressure and operating temperature is: 150 PSIG (10.3 bar) and 150° F (65.6° C).
 A 6' length of vinyl tubing is shipped loose with the unit. Slide over automatic drain which protrudes from bottom of bowl. Place other end of vinyl tubing into appropriate receptacle (i.e. below booth grating, can, etc.). Prevent vinyl tubing from becoming kinked which would prevent free movement of liquids discharged from the automatic drain.
9. An optional manual drain (HAF-11) can be installed in place of the automatic drain.

OPERATION

After the unit is installed and ready to use;

1. Attach air hose(s) to outlet ball valve(s), selecting regulated and/or non-regulated according to the application (not supplied).
2. Open main shut-off valve upstream of filter.
3. Open ball valve(s) (not supplied) to supply air to spray gun or tool being used.
4. After use, shut off ball valve(s) and bleed off residual air in hose(s).

Note

The filter change indicator only operates when air is flowing. It will always be green when there is no flow.

MAINTENANCE



Certain solvents, paints and chemicals may attack plastic bowl and can cause bowl failure. Do not use near these materials. When bowl becomes dirty, wipe only with a clean, dry cloth. Immediately replace any crazed, cracked, damaged or deteriorated plastic bowl with a new plastic bowl. Reinstall metal bowl guard.



Risk of injury. Components under pressure. Relieve air pressure before performing maintenance.

1. Before performing maintenance on unit, close main shut-off valve located upstream of filter. Bleed off residual air in unit.
2. To open filter, press button located on clamp ring and rotate ring either clockwise or counterclockwise while pulling down on ring. The metal bowl guard and plastic bowl can then be removed from the filter head.
3. Remove the filter element by loosening counterclockwise. Clean or replace the filter element. Frequency of element replacement will depend upon air quality, air usage, and condition of the air piping. It is recommended to check the element change indicator daily, and replace when indicator turns red.
4. Inspect "O" ring for damage. Replace if necessary.
5. Inspect plastic bowl for signs of damage such as cracks, crazing or deterioration. Replace if necessary. See "Caution" in Column 2.



Risk of injury. Do not place unit in service without metal bowl guard installed.

6. Before placing unit back into service, make sure plastic bowl and metal bowl guard are properly installed and securely locked in place.
7. Confirm automatic drain operates properly after unit is in operation. Refer to Service Bulletin SB-6-149 which provides automatic drain service information. Replace if necessary.

SERVICE BULLETIN REVISIONS

Please refer to the following chart for Part No./Literature changes.

Part No. Changes			Literature Changes
Old Part No.	New Part No.	Interchangeability	
HAF-511 Filter N.L.S.			Revised Worldwide Sales and Service Listing.
HAF-24 Plastic Bowl N.L.S.			
HAF-19 Metal Bowl Guard N.L.S.			

Warranty

This product is covered by ITW DeVilbiss' 1 Year Limited Warranty. See SB-1-000 which is available upon request.

WORLDWIDE SALES AND SERVICE - www.devilbiss.com

DeVilbiss Industrial Spray Equipment

DeVilbiss has authorized distributors throughout the world. **FOR TECHNICAL ASSISTANCE, CALL TOLL FREE 1-800-338-4448 (U.S.A. ONLY).**

DeVilbiss Automotive Refinishing

DeVilbiss has authorized distributors throughout the world. For equipment, parts and service, check the Yellow Pages under "Automobile Body Shop Equipment and Supplies". **FOR TECHNICAL ASSISTANCE, CALL TOLL FREE 1-800-445-3988 (U.S.A. ONLY).**



An Illinois Tool Works Company