


Binks Line-Striping Spray Guns

RELIABILITY – VERSATILITY – VALUE

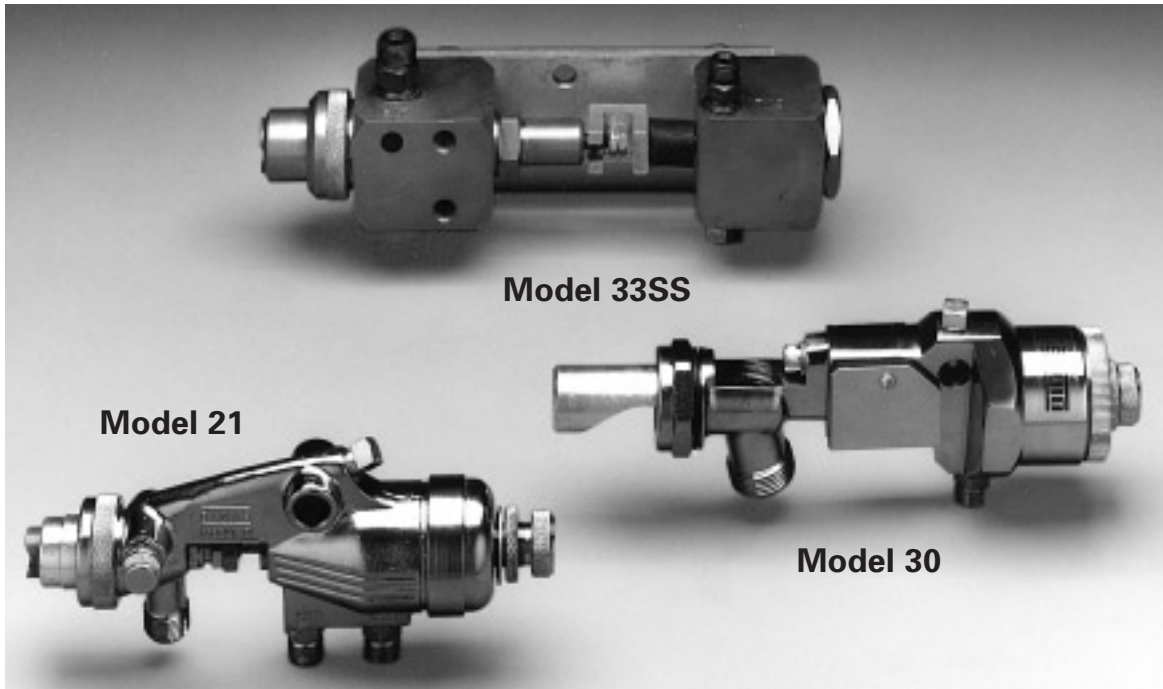

Improve and expand your line striping capabilities with automatic guns from Binks. Designed to mount on almost all types of line striping equipment, each is a pneumatically operated gun built for heavy-duty service.

■ Model 30

Delivers glass beads at a rate of up to 20 lbs. per minute. The gun is triggered on and off by an air piston located at the rear of the gun body. Minimum recommended air pressure for driving the piston is 50 PSI. Atomization air is not required. The gun is furnished with four nozzle inserts having orifice diameters of 7/32, 1/4, 9/32, and 11/32 respectively. 1/4 NPS(m) air inlet. 3/4 NPS(m) glass bead inlet. Optional big bore kit (6-1287) delivers glass beads at a rate of up to 60 lbs. per minute @ 70 P.S.I.

Actual wt. 6 lbs. 1 oz.
Part Sheet 2151

■ Model 21

Heavy duty, pneumatically operated gun for spraying all conventional coatings. Drop-forged, brass-plated body. Adjustable stainless steel fluid needle. Adjustable spray pattern control at side of gun head. Replaceable gasket fluid nozzle seal. Gun controlled remotely with three-way valve. Requires 35 PSI air pressure to trigger. Up to 250 cycles per minute. 3/8 NPS(m) fluid inlet. 1/4 NPS(m) air connections. 1/2 inch dia. mounting hole.

Shpg. wt. 3 lbs.
Actual wt. 2 lbs. 9 oz.
Part Sheet 1143.

■ Model 33SS

Heavy duty high volume gun for use on automatic road striping machine. Can be used at vehicle speeds of 15 to 25 m.p.h. Brass body and Stainless steel head. Stainless steel fluid needle valve. Hardened steel fluid nozzle. Optional nitralloy, hardened steel, or tungsten carbide air nozzle. A port for catalyst injection in the atomizing air is included. Pneumatic operated trigger opens at 45 PSI. Optional round or fan spray nozzle. 1/2 NPS(m) fluid inlet. 3/8 NPS(m) atomizing air inlet. 1/4 NPS(f) cylinder air inlet.

Shpg. wt. 7 1/4 lbs.
Actual wt. 6 lbs. 1 oz.
Part Sheet 1441.



195 Internationale Blvd
Glendale Heights, IL 60139

Visit our Website at: www.binks.com

Tel: (630) 237-5000
Fax: (630) 237-5011

Customer Service – USA
1-800-992-4657

Technical Support – USA
1-888-992-4657