




GRACO
First choice when
quality counts.™

Wax Dispense Packages

- **Consistent control of fluid viscosity for uniform spray applications**
- **Use with virtually any wax coating or equivalent fluid**
- **Easy to install with easy access to electrical connections**
- **President 3:1 with high output capacity**

Precise Application of Wax Coating Materials

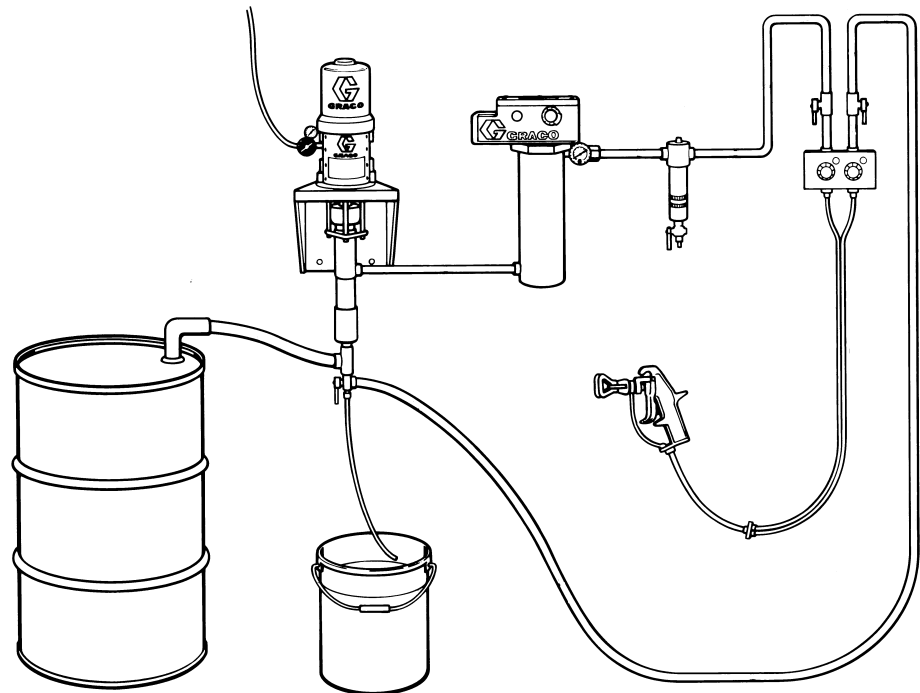

970-203 Manual Dispense Pump Package

Graco offers a variety of pumping and dispensing packages to apply wax in cavity and transit coating applications. Graco cavity wax packages spray wax into interior panel cavities to provide corrosion resistance for doors, hoods and decklids. Transit wax packages spray a fine coating of wax onto the vehicle exterior for painted surface protection. All Graco wax dispense packages use the production proven 3:1 President pump for long life performance.

Typical Fluids Handled

- Cavity wax
- Transit wax

Typical Applications

- Interior panel coating
- Exterior surface coating

Technical Specifications for Viscon² Fluid Heater

| | |
|-----------------------|--|
| Temperature range | 85°-220°F (29°-104°C) |
| Cycling accuracy | ±3°F (1.7°C) |
| Fluid pressure rating | 0-4000 psig |
| Control device | liquid-filled bulb thermostat |
| High limit thermostat | bi-metal and thermal-fuse back-up |
| Wetted parts | 303 and 304 SST |
| Fluid passage | 1/2 in. dia. tubing x 164 in. length (12.5 mm dia. tubing x 4165 mm length) |
| Inlet | 1/2 npt(f) |
| Outlet | 3/8 npt(f) |
| Pressure drop | 4.5 psi @ 0.3 gpm @ 55 centipoise fluid |
| Dimensions | 18 in. H x 10.5 in. W x 8.5 in. D (46 mm H x 27 mm W x 22 mm D) |
| Weight | 37 lbs. (16.8 kg) |
| Instruction manual | 307-805 |

President 3:1 Bare Pump

| | |
|--------------------------|------------------------------|
| Maximum working pressure | 360 psi (2.5 MPa, 25 bar) |
| Max. air input pressure | 120 psi (0.81 MPa, 8.16 bar) |
| Maximum continuous flow | 10 gpm (38 lpm) |
| Volume per cycle | 21.3 oz (630 cc) |
| Air inlet size | 3/8 npsm(f) |
| Fluid inlet size | 1-1/2 npt(f) |
| Fluid outlet size | 1 npt(f) |
| Weight | 47 lb (21.32 kg) |
| Instruction manual | 307-674 |



235-462 Silver Plus™ Gun

Ordering Information

970-146 Cavity Wax Pump/Spray Package with Adjust-A-Stroke

Includes wall mount 3:1 President pump, Adjust-A-Stroke with control panel, 25 ft. (7.6 m) fluid dispense hose, Z-swivel, Silver Plus gun, and 36 in. (913 mm) spray nozzle extension wand with 360° conical tip.

970-147 Cavity Wax Pump/Spray Package

Includes wall mount 3:1 President pump, 25 ft. (7.6 m) fluid dispense hose, Z-swivel, Silver Plus gun, and 36 in. (913 mm) spray nozzle extension wand with 360° conical tip.

970-203 Transit Wax Pump/Spray Package

Includes wall mount 3:1 President circulation pump, Viscon II heater, filter, 25 ft. (7.6 m) fluid dispense hose, return line kit, straight swivel, AA Plus manual spray gun with spray tip, air hose and air regulator.

Accessories

970-148 Manual Dispense Spray Kit

Includes 25 ft. (7.6 m) fluid dispense hose, Z-swivel, Silver Plus gun, and 36 in. (913 mm) spray nozzle extension wand with 360° conical tip.

Optional Mounting Brackets

- 183-982 Wall mounting
- 183-484 Cart mounting clamp (2 each)
- 183-485 Cart mounting bar (2 each)

Information on Silver Plus gun tips can be obtained from data sheet 305-796.