



First choice when
quality counts.™

IM5™

Inline Electronic Meter

- **Easy to use, easy to calibrate**
- **Electronic accuracy will save you dollars, material and time**
- **Heavy-duty and durable, works in extreme weather conditions**
- **Dispenses up to 5 gpm (19 lpm) for fast filling**
- **Uses a replaceable 9-volt battery**



An affordable and reliable electronic meter

Graco's new IM5 electronic meter provides reliable performance in a variety of lubrication applications. The IM5 can be installed in line on the wall for metering gear lube drops or oil bars. The IM5 is used to meter the 1:1 taper and 3:1 portable gear lubers. The IM5 meter's rugged construction, sealed design, and field replaceable 9-volt battery will give years of trouble-free service. Now the accuracy and reliability of a Graco electronic meter are available for virtually all of your lube metering applications.

Typical Fluids Handled

- Motor oil
- Gear oil
- Windshield wash solvent
- Automatic transmission fluid
- Hydraulic fluid
- Specialty lubricants
- Anti-freeze

Typical Applications

- Fast lubes
- General automotive service centers
- Dealerships (automotive and truck)
- Specialty service shops

Technical Specifications

Flow range 0.5-5 gpm (1.9-19 lpm)

Maximum working pressure . . . 500 psi (3.4 MPa, 34 bar)

Weight 1.8 lbs. (0.82 kg)

Units of measurement* factory-set quarts

User selectable to gallons, quarts, pints, or liters.

Accuracy ± 0.5%

Inlet/outlet 1/2 npt

Note: Meter can be installed with flow in either direction.

Operating temperature range . . . -4 to 122°F (-20 to 50°C)

Storage temperature range . . . -13 to 122°F (-25 to 50°C)

Battery standard 9-volt, alkaline

Expected battery life in a typical shop environment: 6 months to 1 year

Wetted parts nickel, zinc, Zenite®, nitrile rubber

Instruction manual 308-687

* Display shows quantity in 0.01 increments up to 999.99 gallons, quarts, pints, or liters. Totalizes in gallons or liters up to 99,999 units.

Zenite® is a registered trademark of Du Pont

Ordering Information

239-824 IM5 Inline Electronic Meter


Accessories

113-716 Battery, Standard 9-Volt, Alkaline

Graco's IM5 used in a variety of lube applications



On a metered tapper . . .

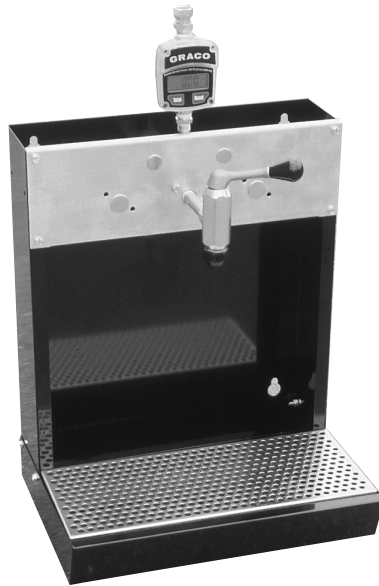

On a metered tapper oil dispense bar . . .



On a portable 3:1 gear luber . . .

LUBRICATION